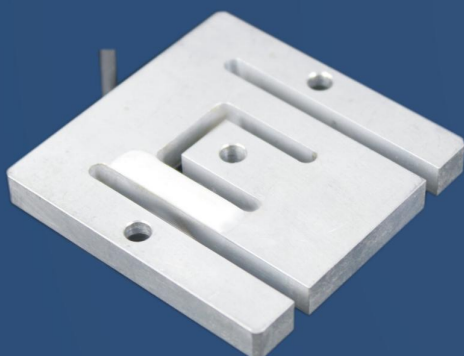




**SZJOINT**Joint Sensor Instruments (H. K.) Ltd.
Joint Sensor Instruments (Shenzhen) Ltd.

6400

特殊用传感器**Spoke style / Shearing beam /
Bridge style Load Cell****材质： 铝合金****Materials: Aluminum alloy**

6400型采用铝合金材质，无色阳极氧化处理，硅胶密封，Ip65。适用于超薄平台秤及小台秤

Model 6400 is constructed using aluminum alloy material, colorless anodized, Silicone seal, Ip65. Application: For ultra thin platform scale, small platform scale

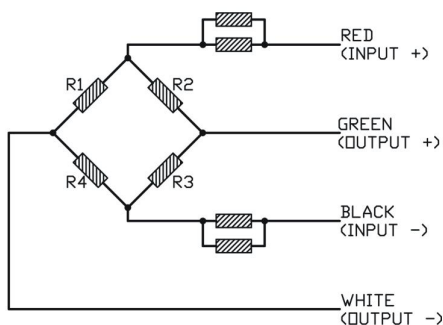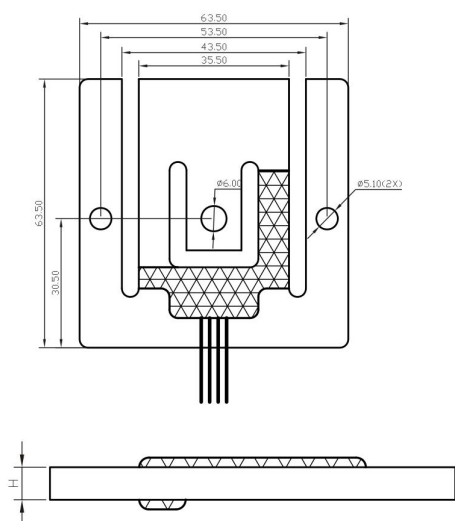

主要技术指标 Specifications

量程 Capacity	50/75/90/150KG
综合误差 Comprehensive Error	C2
输出灵敏度 Output Sensitivity	1.0±0.1mV/V
非线性 Nonlinearity	±0.05%F.S
重复性 Repeatability	±0.05%F.S
滞后性 Hysteresis	±0.05%F.S
蠕变 Creep	±0.05%(20min)F.S
零点温度漂移 Temperature effect on Zero	≤±0.05%F.S/10℃
额定输出温度漂移 Temperature effect on Output	≤±0.05%F.S/10℃
零点输出 Zero Output	±0.1mV/V
输入电阻 Input resistance	1157±50Ω
输出电阻 Output resistance	1000±10Ω
绝缘电阻 Insulation Resistance	≥2000MΩ/100VDC
推荐激励电压 Excitation Voltage	5~10(DC)V
工作温度范围 Temperature compensated	0~40℃
安全过载 Safe overload	150%F.S