

Model 832M1 Accelerometer

Triaxial Piezoelectric Accelerometer
<22 μ A Current Consumption
Wide Bandwidth to 6kHz
Circuit Board Mountable



The Model 832M1 is a low cost, board mountable triaxial accelerometer. Featuring stable piezo-ceramic crystals, the accelerometer incorporates full power and signal conditioning with a maximum current consumption of 22 micro-amps. The model 832M1 is available in $\pm 25g$ to $\pm 500g$ ranges and provides a flat frequency response up to greater than 6kHz. The standard model 832 offers the same envelope with a lower maximum current consumption of 4 micro-amps.


FEATURES

- $\pm 25g$ to $\pm 500g$ Dynamic Range
- Low Cost Triaxial
- Hermetically Sealed
- Piezo-ceramic Crystals
- -40° to $+125^{\circ}C$ Operating Range

APPLICATIONS

- Asset Monitoring
- Data Loggers
- Impact Monitoring
- Machine Health Monitoring
- System Wake-Up Switch
- Embedded Applications

dimensions

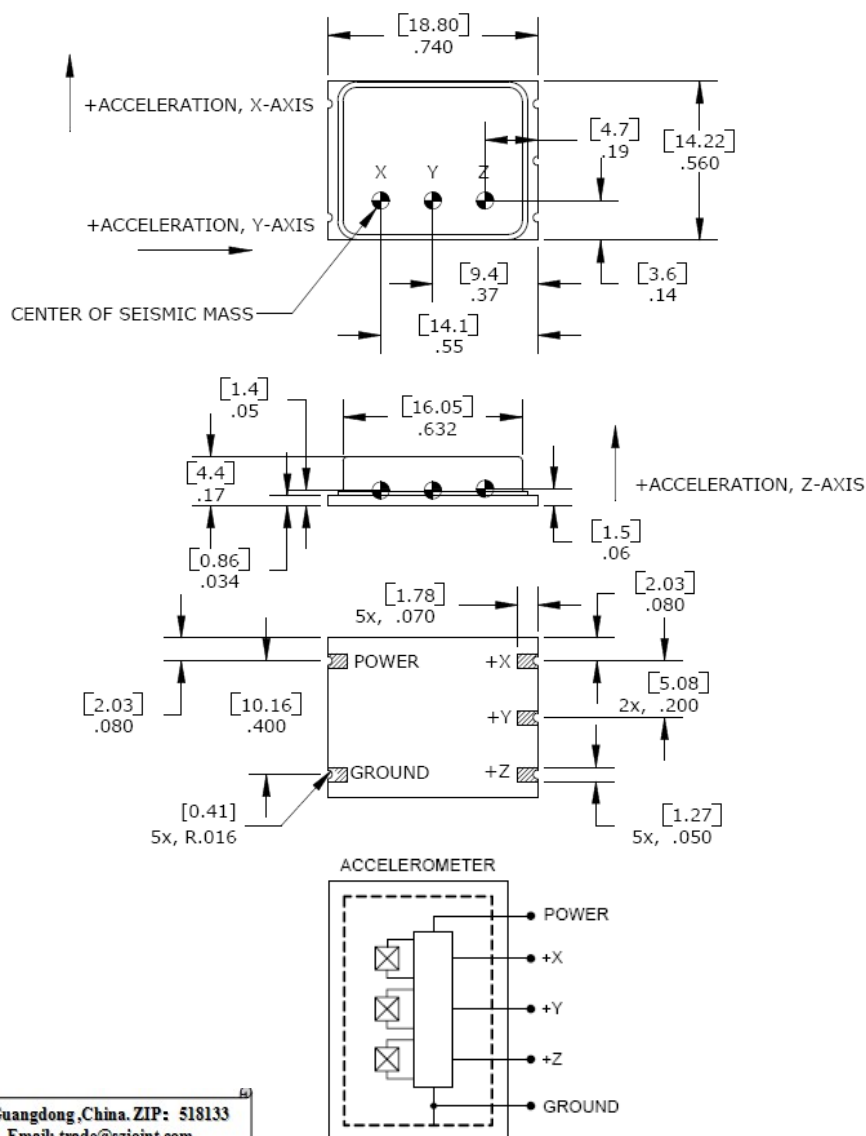

Model 832M1 Accelerometer

performance specifications

All values are typical at +24°C, 100Hz and 3.3Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice. Standard product parameters are described in PSC-1001 for Embedded AC Accelerometers.

Parameters

DYNAMIC

	±25	±50	±100	±200	±500	Notes
Range (g)	±25	±50	±100	±200	±500	
Sensitivity (mV/g)	50.0	25.0	12.5	6.25	2.5	±30%
Frequency Response (Hz)	2-6000	2-6000	2-6000	2-6000	2-6000	±2dB
Natural Frequency (Hz)	>10000	>10000	>10000	>10000	>10000	
Non-Linearity (%FSO)	±2	±2	±2	±2	±2	
Transverse Sensitivity (%)	<8	<8	<8	<8	<8	
Shock Limit (g)	5000	5000	5000	5000	5000	

ELECTRICAL

	Exc Voltage / 2	Exc Voltage / 2	Exc Voltage / 2	Exc Voltage / 2	Exc Voltage / 2	
Bias Voltage (Vdc)	Exc Voltage / 2	Exc Voltage / 2	Exc Voltage / 2	Exc Voltage / 2	Exc Voltage / 2	
Total Supply Current (μA) ¹	<22	<22	<22	<22	<22	
Excitation Voltage (Vdc) ³	3.0 to 5.5	3.0 to 5.5	3.0 to 5.5	3.0 to 5.5	3.0 to 5.5	
Output Impedance (Ω)	<100	<100	<100	<100	<100	
Insulation Resistance (MΩ)	>100	>100	>100	>100	>100	@100Vdc
Broadband Noise (μV)	320	160	80	40	30	2Hz-10kHz
Spectral Noise (μg/√Hz)	240	240	240	240	600	@ 10Hz
Spectral Noise (μg/√Hz)	64	64	64	64	160	@ 100Hz
Spectral Noise (μg/√Hz)	24	24	24	24	60	@ 1000Hz
Shielding	100%					
Ground Isolation	Isolated from Mounting Surface					

ENVIRONMENTAL

Temperature Response (%)	-20/+30 from -40°C to +125°C
Operating Temperature (°C)	-40 to +125
Storage Temperature (°C)	-40 to +125

PHYSICAL

Sensing Element	Ceramic (shear mode)
Case Material	Ceramic Base, Nickel Silver Cover
Weight (grams)	3.0

¹ A lower current consumption of 4 micro-amperes is available on model 832.

² The model 832M1 is not to be reflow soldered at high temperature, manual soldering is recommended. See application note.

³ The model 832M1 can be operated with 2.8V excitation but the full-scale range will be limited.

Calibration supplied: CS-SENS-0100 NIST Traceable Amplitude Calibration at 100Hz

Wiring color code: See schematic

ordering info

PART NUMBERING Model Number+Range

832M1-GGGG

|
| Range (0200 is 200g)

Example: 832M1-0200
Model 832M1, 200g